


SQR  
SOLENOID QUICK RELEASE

10901008  
10901007

MKIII 24vDC (c/w relay contacts for BMS)  
MKIII 110–230v/50Hz (c/w relay contacts for BMS)

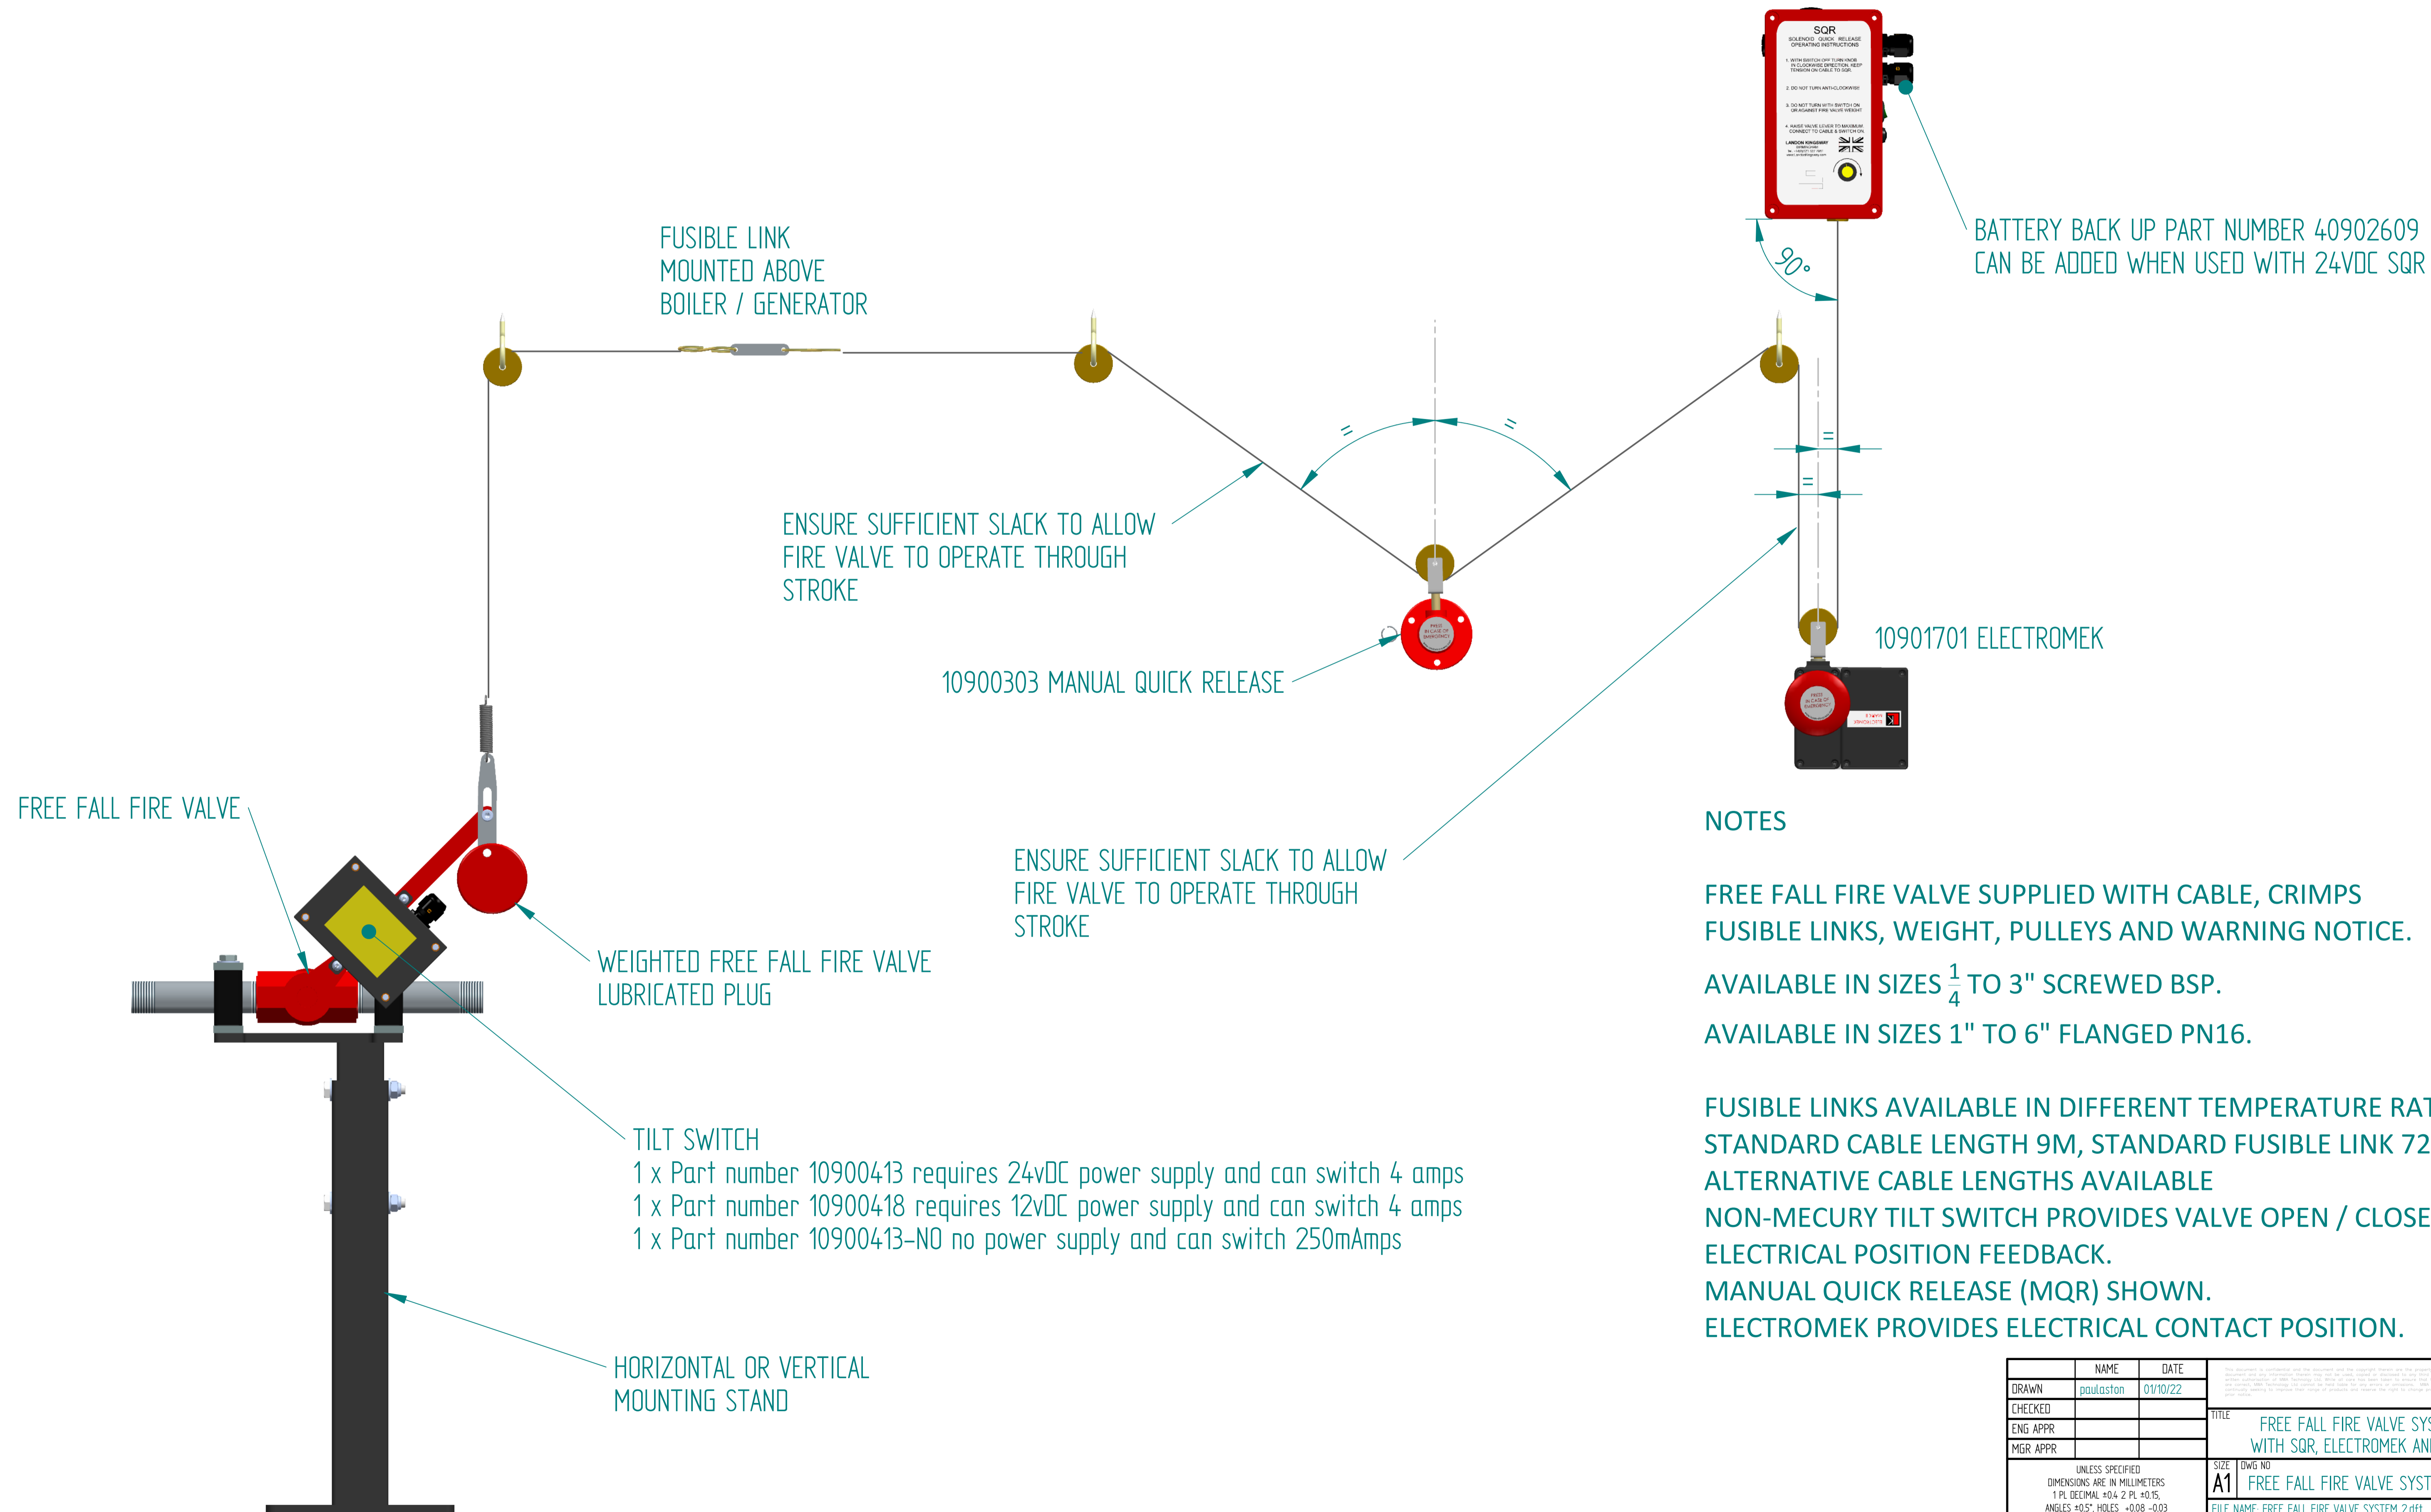

## NOTES

FREE FALL FIRE VALVE SUPPLIED WITH CABLE, CRIMPS  
FUSIBLE LINKS, WEIGHT, PULLEYS AND WARNING NOTICE.

AVAILABLE IN SIZES  $\frac{1}{4}$ " TO 3" SCREWED BSP.

AVAILABLE IN SIZES 1" TO 6" FLANGED PN16.

FUSIBLE LINKS AVAILABLE IN DIFFERENT TEMPERATURE RATINGS  
STANDARD CABLE LENGTH 9M, STANDARD FUSIBLE LINK 72°C  
ALTERNATIVE CABLE LENGTHS AVAILABLE  
NON-MERCURY TILT SWITCH PROVIDES VALVE OPEN / CLOSED  
ELECTRICAL POSITION FEEDBACK.  
MANUAL QUICK RELEASE (MQR) SHOWN.  
ELECTROMEK PROVIDES ELECTRICAL CONTACT POSITION.

	NAME	DATE	<small>THIS DRAWING IS THE PROPERTY OF THE COMPANY AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. THE COMPANY ASSUMES NO LIABILITY FOR ANY DAMAGE OR LOSS OF ANY KIND, INCLUDING BUT NOT LIMITED TO, DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THIS DRAWING. THE COMPANY'S LIABILITY IS LIMITED TO THE AMOUNT PAID FOR THE SERVICES PROVIDED. THE COMPANY'S LIABILITY IS LIMITED TO THE AMOUNT PAID FOR THE SERVICES PROVIDED.</small>		
DRAWN	paulaston	01/10/22	TITLE	FREE FALL FIRE VALVE SYSTEM WITH SQR, ELECTROMEK AND MQR	
CHECKED					
ENG APPR					
MGR APPR					
UNLESS SPECIFIED DIMENSIONS ARE IN MILLIMETERS 1 PL DECIMAL +0.2 2 PL +0.15, ANGLES +0.5°, HOLES -0.08 -0.03 THREADS TO BS3643-6g/6h			SIZE	DWG NO	RE
			A1	FREE FALL FIRE VALVE SYSTEM 2	2
			FILE NAME: FREE FALL FIRE VALVE SYSTEM 2.dwt		
			SCALE: 1/4"	WEIGHT: 1/4"	SHEET 1 OF 1