


Lubricating & Sealing Compound

Lubrication of Landon Kingsways Free Fall Fire Valve is recommended 3 times annually. Using a grease injection gun (10034501 & 10034521), connect to the grease nipple at the end of the lubricating screw. If lubricating by hand remove the lubricating screw from the end of the square shaft. Fill the reservoir inside the shaft with lubricant stick and replace the screw. Tighten the screw until a definite increase in resistance is felt, inserting further lubricant as necessary. 'Pump' the valve lever up and down several times to ensure the valve is free-moving.

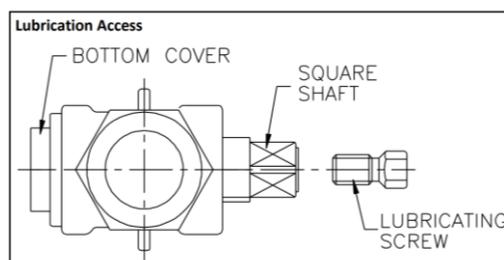

Part Number	Description	
99013852	Cartridge for all valve sizes	
99015559/4	Stick - 3/8" (Pack of 4, for 1/2" to 2" valves)	
99015559/8	Stick - 3/8" (Pack of 8, for 1/2" to 2" valves)	
99015559/16	Stick - 3/8" (Pack of 16, for 1/2" to 2" valves)	
99015560/4	Stick - 1/2" (Pack of 4, for 2 1/2" to 6" valves)	
99015560/8	Stick - 1/2" (Pack of 8, for 2 1/2" to 6" valves)	
99015560/16	Stick - 1/2" (Pack of 16, for 2 1/2" to 6" valves)	
10034501	Manual Grease Gun 16oz (7000 psi) <u>requires connector</u>	
10034511	16mm Connector (measure diameter of grease nipple for suitability)	